

AVP PANEL

EXPOSED FASTENING SYSTEM

PRODUCT SPECIFICATIONS

Applications: Wall

Coverage Widths: 36"

Rib Spacing: 12" on center

Rib Height: 1 1/8"

Panel Attachment: Exposed Fastening System

Gauges: 26 (standard); 22, 24 and 29 (optional)


Finishes: Smooth (standard); Embossed (optional)

Coatings: Galvalume Plus®, Standard Color, Kynar

The AVP panel is used for wall application and features pencil ribs, providing improved aesthetics to the building design.

FEATURES AND BENEFITS

- The AVP panel allows for more insulation to be added behind the panel, providing greater insulating values that meet the energy codes and R-value requirements.
- UL 263 internal fire rating is available.

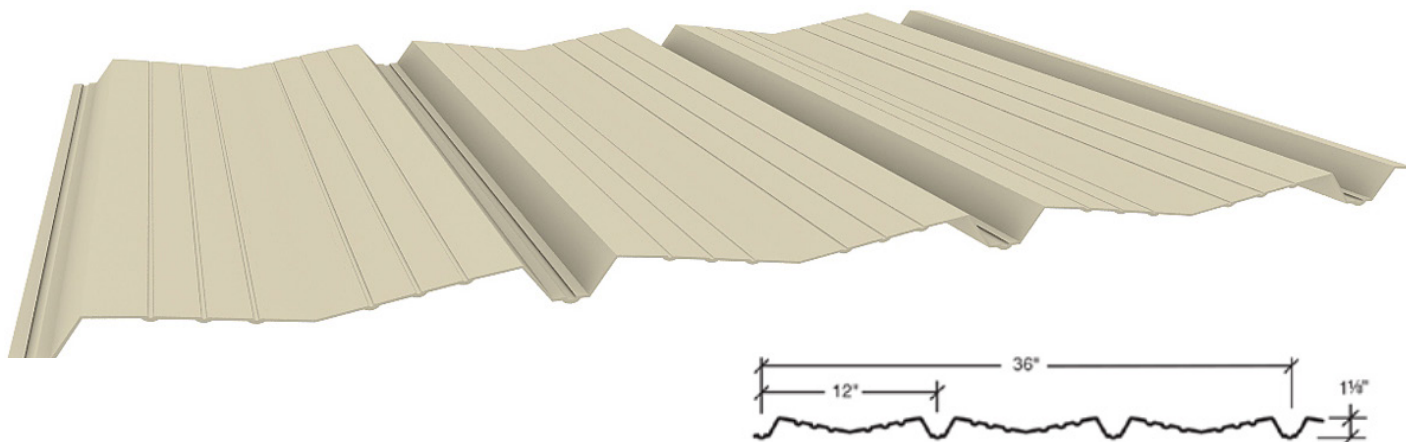

CATEGORY	CHARACTERISTIC	TEST METHOD	PURPOSE	RESULT
STRUCTURAL	Negative Wind Loads	AISI S100	North American Specification for the Design of Cold-Formed Steel Structural Members	See Section Properties and Allowable Load Table Section
	Positive Wind Loads	AISI S100	North American Specification for the Design of Cold-Formed Steel Structural Members	See Section Properties and Allowable Load Table Section