

FW-120 PANEL

CONCEALED FASTENING SYSTEMS

PRODUCT SPECIFICATIONS

Applications: Wall and Fascia

Coverage Widths: 12"

Panel Attachment: Concealed Fastening System

Gauges: 24 (standard); 22 and 20 (optional)


Finishes: Smooth (standard); Embossed (optional)

Coatings: Kynar

The FW-120 panel is a concealed fastener wall and liner panel that provides a flat appearance. FW-120 is commonly used for architectural, commercial and industrial markets. The heavy-gauge offering provides for large spanning capabilities, particularly in composite wall applications.

FEATURES AND BENEFITS

- FW-120 is available in a flat profile with no beads, one bead or two beads.
- The FW-120 panel has been tested by a certified independent laboratory in accordance with ASTM test procedures for Air Infiltration and Water Penetration at the sidelap. Test results show no air leakage at 1.57 psf and no water penetration at 6.24 psf differential pressure.
- FW-120 carries Florida approval.

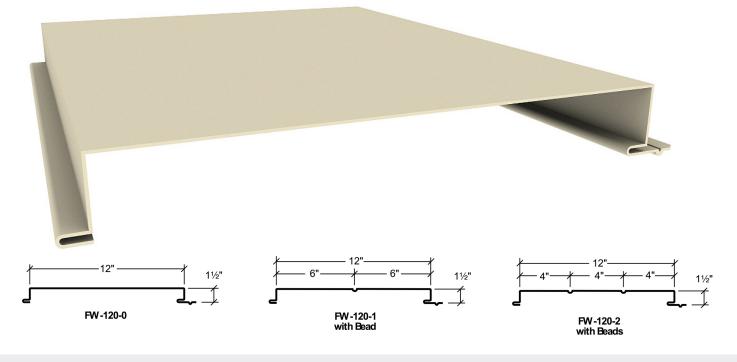

Vulcan Steel Structures, Inc. 500 Vulcan Parkway Adel, GA 31620 1-800-258-3369 www.vulcansteel.com sales@vulcansteel.com

These contents are for general information only and are not intended to serve as any type of advice. Every effort is made to ensure the accuracy of the information included herein and it is believed to be accurate and reliable as of the date of publication. Vulcan Steel Structures does not warrant or represent the accuracy or reliability of any information included in this brochure. Any reliance on any information without consultation with Vulcan Steel Structures or a duly authorized representative shall be at the user's own risk.



FW-120 PANEL

CATEGORY	CHARACTERISTIC	TEST METHOD	PURPOSE	RESULT
ENVIRONMENTAL	Air Leakage	ASTM E283	Determines the air leakage rates of exterior windows, curtain walls and doors under specified air pressure differences across the specimen	0.000 cfm/fť at 6.24 psf static pressure 0.113 cfm/fť at 20.00 psf static pressure
	Water Penetration	ASTM E331	Determines the resistance of exterior windows, curtain walls, skylights and doors to water penetration when water is applied under uniform static air pressure difference	No uncontrolled water penetration through the panel joints at a static pressure of 13.24 psi
STRUCTURAL	Negative Wind Loads	ASTM E1592	Provides a standard procedure to evaluate or confirm structural performance under uniform static air pressure difference	See Load Chart Section
	Positive Wind Loads	AISI S100	North American Specification for the Design of Cold-Formed Steel Structural Members	See Section Properties and Allowable Load Table Section
ROOF LISTING	Roof Performance - Florida Approval	ASTM E1592	Florida product approval is the approval of products and systems, which comprise the building envelope and structural frame, for compliance with the structural requirements of the Florida Building Code.	See FL# 11917.3

These contents are for general information only and are not intended to serve as any type of advice. Every effort is made to ensure the accuracy of the information included herein and it is believed to be accurate and reliable as of the date of publication. Vulcan Steel Structures does not warrant or represent the accuracy or reliability of any information included in this brochure. Any reliance on any information without consultation with Vulcan Steel Structures or a duly authorized representative shall be at the user's own risk.