

A PANEL

EXPOSED FASTENING SYSTEM

PRODUCT SPECIFICATIONS

Applications: Wall

Coverage Widths: 36"

Rib Spacing: 12" on center

Rib Height: 1 1/8"

Panel Attachment: Exposed Fastening System

Gauges: 26 (standard); 22, 24 and 29 (optional)


Finishes: Smooth (standard); Embossed (optional)

Coatings: Galvalume Plus®, Standard Color, Kynar®, Fluoropon®

The A panel is used for wall application and features pencil ribs, providing improved aesthetics to the building design.

FEATURES AND BENEFITS

- The A panel allows for more insulation to be added behind the panel, providing greater insulating values that meet the energy codes and R-value requirements.
- UL 263 internal fire rating is available.

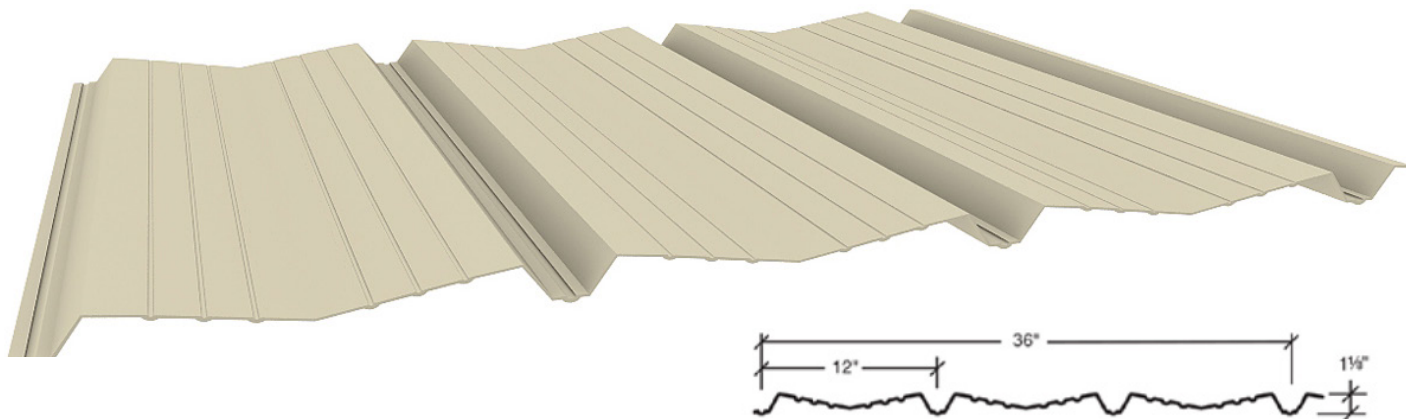

CATEGORY	CHARACTERISTIC	TEST METHOD	PURPOSE	RESULT
STRUCTURAL	Negative Wind Loads	AISI S100	North American Specification for the Design of Cold-Formed Steel Structural Members	See Section Properties and Allowable Load Table Section
	Positive Wind Loads	AISI S100	North American Specification for the Design of Cold-Formed Steel Structural Members	See Section Properties and Allowable Load Table Section
WALL LISTINGS	Wall Performance - Florida Approval	ASTM E 1592	Florida Product Approval is the approval of products and systems, which comprise the building envelope and structural frame, for compliance with structural requirements of the Florida Building Code	See Product Listing