

## DM40 Mesa Wall Panel

### PRODUCT PARAMETERS

Panel Thickness:			
3"	4"	5"	6"
Insulating Values (R):**			
24	32	41	49

**Panel Width:** 40"

**Panel Length:** 8' minimum to 50' maximum based on a 48' flatbed trailer length (consult your sales representative for other available lengths)

**Insulation Material:** CFC-free, foamed-in-place polyisocyanurate foam (2.1 to 2.5 PCF density)

**Joint Configuration:** Monolithic single tongue-and-groove

**Metal Facings:** 26-gauge galvanized steel (22-gauge, 24-gauge galvanized steel available; 26-gauge stainless steel available for interior use)

**Coatings:** Imperial White polyester (plastisol available)

**Accessories:** Fasteners, clips, sealants and brake-formed flashings

### TESTED & APPROVED

The insulated panel products have been extensively tested under a variety of North American standards:

**FM 4880:** Class 1 Fire Rating

**ASTM E331:** Water Penetration

**ASTM E283:** Air Infiltration

**ASTM C518/C1363:** Thermal Transmission

**ASTM E72:** Structural Strength

**ASTM E84:** Flame Spread




\*\*R-Value tested in accordance with ASTM C518/C1363 at 40°F mean temperature, adjusted for a windspeed of 15 mph.

### INNOVATIVE. ADAPTABLE. ENERGY EFFICIENT.

DM40 is the widest Mesa panel featuring monolithic tongue-and-groove joinery for fast, easy installation. It is specifically designed for interior wall and ceiling applications.

### FEATURES AND BENEFITS

- The 3/32" low-profile exposed surface simplifies face sealing of joints and trim terminations when required for heavy processing environments.
- The 40" net width reduces both the number of longitudinal joints to thermally seal and the number of panels to install.
- The standard highly durable 26-gauge exposed steel facing(s) with an embossed, high heat coil coated paint finish are perfect for most interior applications.
- The structural integrity of the DM40 panel allows for exceptional spans between supports on interior walls and ceilings.
- The panel arrives on-site in one piece and requires a simple one-step installation, reducing construction time and costs.

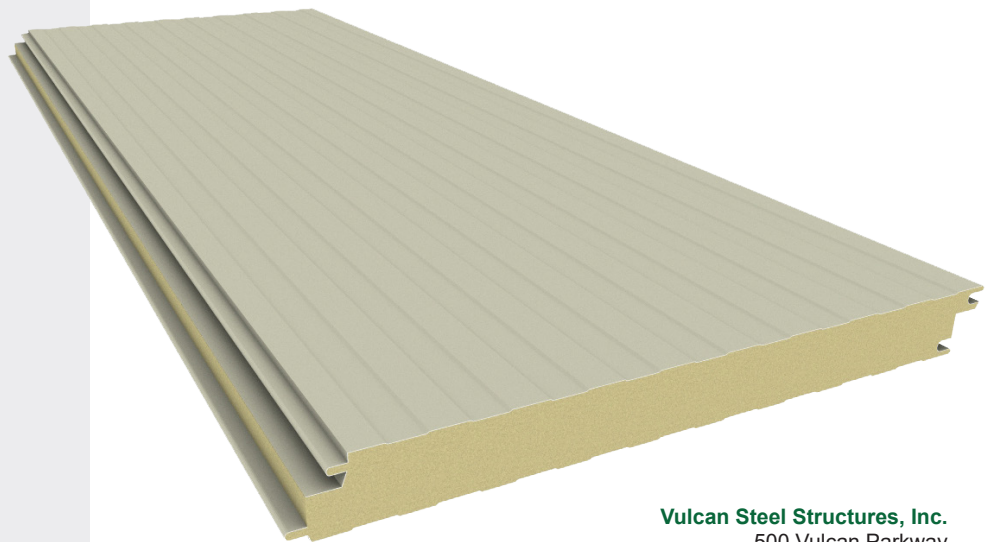

**Vulcan Steel Structures, Inc.**  
 500 Vulcan Parkway  
 Adel, GA 31620  
 1-800-258-3369  
[www.vulcansteel.com](http://www.vulcansteel.com)  
[sales@vulcansteel.com](mailto:sales@vulcansteel.com)